

Available in 100%
recycled Eco version

ECLIPSE MINI TEXTURED

With its hidden interlock system, the Mini Textured Eclipse is perfect for a wide range of applications, including commercial, domestic and office flooring.

At 5mm thick and measuring 458mm x 458mm, the Eclipse Mini is our smallest tile in the Flexi-Tile range. Specially designed for areas of high footfall and daily usage, the Eclipse Mini is stain resistant and comes with a 25-year guarantee.

The Flexi-Tile Eclipse Mini can be installed on damaged, cracked and damp concrete and epoxy surfaces with minimal sub-floor preparation. The unique loose lay system means the Flexi-Tile Standard Studded is quick and easy to install, with minimal down-time in comparison to other flooring types.

Available in 8 different colours, the 5mm Textured Eclipse range is regularly used in commercial premises and public areas, such as gyms, schools and garage showrooms. With anti-slip and noise reduction attributes, Eclipse Mini Textured meets all EU safety standards, whilst also looking visually attractive and feeling comfortable underfoot.


Benefits and features of this product are:

- Unique hidden interlock
- Quick to install - Minimal production down time
- Low maintenance
- Reaction To Fire Performance - BFL-S1
- Anti-Slip
- Resistant to most chemicals
- 100% recyclable
- Sound Absorbing
- Anti-fatigue
- Resists punctures & abrasions
- Available in a standard or ESD version

Colour Options

Eclipse Mini Textured Range

Eclipse Mini Textured tiles are available in the following colours:

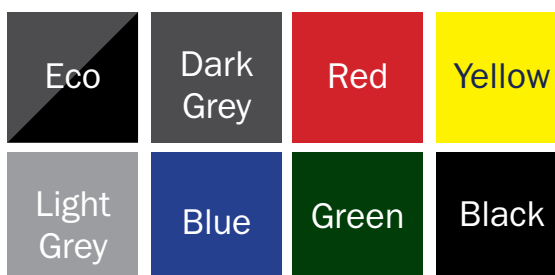

N.B. Other colours are available depending on quantity required. Colours shown above may vary from colour of manufacture.



ECLIPSE MINI TEXTURED Technical Specification

STANDARD	Material (PVC) Weight (kg)	Polyvinyl Chloride 1.45 kg / tile
	Tile Dimensions	458mm ²
BS EN 428	Thickness	5 ± 0.2
BS EN 423	Staining Resistance	√
BS EN 425	Castor Chair Suitability	√
BS EN 427	Squareness & Straightness	<0.04
BS EN 660-2	Abrasion Resistance (wear group)	T
BS EN 649	Class 34/43 - Commercial Very Heavy/ Light Industrial	√
BS EN 435	Flexibility (mm)	No cracking at 10mm
BS EN 20105	B02 Light Fastness	>7
BS EN 433	Residual Indentation (mm)	≤0.10
BS EN ISO 140-8	Impact Noise Reduction (dB)	16
BS EN 434	Dimensional Stability (%)	0.04
BS EN 434	Curling After Exposure Heat (mm)	0.04
BS EN 14041	European Building Standard	√
BS EN 13501	Reaction To Fire Performance	Bfl-S1
BS EN 14184	Formaldehyde Content (Class)	E1 (CWFT)
BS EN 12667	Thermal Resistance (m ² k/w)	0.02956
BS EN 1081	Electrical Resistance (ohms)	≤10 ⁵⁻⁹ Ω
BS EN 1815	Static Electrical Propensity (kv)	<2.0
BS EN 13893	Slip Resistance (class)	DS
DIN 51130	German Standard Slip Resistance	R10

For more information contact us now:

Telephone: +44 (0) 28 9262 5898 **Email:** info@flexi-tile.com

Flexi-Tile, 5 Ferguson Drive, Knockmore Hill Industrial Park, Lisburn, Northern Ireland, BT28 2EX

www.flexi-tile.com is part of the Unicorn Group