

Available in 100%  
recycled ECO version



**25**  
YEAR GUARANTEE

## ECLIPSE HD TEXTURED

**The Eclipse HD is designed for a wide range of heavy-duty applications including industrial, factory and warehouse flooring. Specifically designed for the stresses of industrial usage, the 7mm thick Heavy-Duty Eclipse is our most durable flooring solution.**

The Flexi-tile HD is manufactured with a unique hidden interlock, giving this flooring a smooth and seamless finish once laid. Designed specifically to support heavy loads, the Eclipse HD can easily withstand the daily rigors imposed by forklifts, pallet trucks and any production machinery. The Eclipse HD is designed so it can be laid using adhesive, which effectively waterproofs your flooring surface, making it increasingly difficult to damage areas where heavy machinery is used repetitively and spillages are a constant threat.

Flexi-Tile's 'Loose Lay' design means the Eclipse HD is perfect for installation on damp, cracked and damaged concrete or epoxy floors. Both quick and easy to lay, with minimum effort needed to clean and maintain, the Eclipse HD tile is the perfect choice for any busy industrial environment. With a 25 Year guarantee, this flooring solution will be able to withstand decades of daily abuse without compromising on comfort and style.

Available in 8 different colours, Flexi-Tile HD flooring will brighten up any area and provide extra safety in the work place. With Anti-slip and noise reduction attributes, this chemical resistant flooring meets all EU safety standards whilst looking great and feeling comfortable underfoot.


### Benefits and features of this product are:

- Unique hidden interlock
- Quick to install - minimal production down time
- Simple installation
- Low maintenance
- Reaction to fire performance - BFL-S1
- Anti-slip
- Resistant to most chemicals
- 100% recyclable
- Sound Absorbing
- Anti-fatigue
- Resists punctures & abrasions
- Available in a standard or ESD version

### Colour Options

#### Eclipse HD Textured Range

Eclipse HD Textured tiles are available in the following colours:

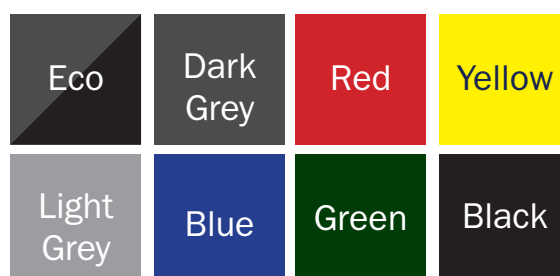

**N.B.** Other colours are available depending on quantity required. Colours shown above may vary from colour of manufacture.



## ECLIPSE HD TEXTURED Technical Specification

STANDARD	Material (PVC) Weight (kg)	Polyvinyl Chloride 2.2 kg / tile
	Tile Dimensions	500mm <sup>2</sup>
BS EN 428	Thickness	7 ± 0.2
BS EN 423	Staining Resistance	√
BS EN 425	Castor Chair Suitability	√
BS EN 427	Squareness & Straightness	<0.04
BS EN 660-2	Abrasion Resistance (wear group)	T
BS EN 649	Class 34/43 - Commercial Very Heavy/ Light Industrial	√
BS EN 435	Flexibility (mm)	No cracking at 10mm
BS EN 20105	B02 Light Fastness	>7
BS EN 433	Residual Indentation (mm)	≤0.10
BS EN ISO 140-8	Impact Noise Reduction (dB)	16
BS EN 434	Dimensional Stability (%)	0.01
BS EN 434	Curling After Exposure Heat (mm)	0.04
BS EN 14041	European Building Standard	√
BS EN 13501	Reaction To Fire Performance	Bfl-S1
BS EN 14184	Formaldehyde Content (Class)	E1 (CWFT)
BS EN 12667	Thermal Resistance (m2 k/w)	0.03807
BS EN 1081	Electrical Resistance (ohms)	≤10 <sup>13</sup> Ω
BS EN 1815	Static Electrical Propensity (kv)	<2.0
BS EN 13893	Slip Resistance (class)	DS
DIN 51130	German Standard Slip Resistance	R10

For more information contact us now:

**Telephone:** +44 (0) 28 9262 5898 **Email:** info@flexi-tile.com

Riverbank, The Green, Lisburn, BT27 5SR, Northern Ireland, UK

**www.flexi-tile.com** is part of the Unicorn Group