



Available in 100%
recycled Eco version

FLEXI-TILE STANDARD STUDDED

The Flexi-Tile Standard Studded is designed for a wide range of application including in commercial, domestic and light industrial flooring. Easily cleaned and maintained, the Standard Studded range comes with a 25-year guarantee.

The Flexi-Tile Standard Studded is specially designed so it can be installed on damaged, cracked and damp surfaces with minimal sub-floor preparation. The unique loose lay system means the Flexi-Tile Standard Studded is quick and easy to install, with minimal down-time in comparison to other flooring types.

The Flexi-Tile Standard Studded is manufactured with the unique T-shaped interlock design, giving this flooring increased structural strength, whilst maintaining ease of installation. At 4.5mm thick, the Flexi-Tile Standard is not suitable for heavy industry but is perfect any other flooring application.

Available in 8 different colours, the Studded range is regularly used in commercial premises and public areas, such as gyms, schools and garage showrooms. With Anti-slip and noise reduction attributes, Flexi-Tile Standard flooring meets all EU safety standards, whilst also looking visually attractive and feeling comfortable underfoot.


Benefits and features of this product are:

- Unique T-shaped interlock
- Easy installation
- Low maintenance
- Reaction To Fire Performance - BFL-S1
- Anti-Slip
- Resistant to most chemicals
- 100% recyclable
- Sound Absorbing
- Anti-fatigue
- Resists punctures & abrasions
- Available in a standard or ESD version

Colour Options

Standard Studded Range

Standard Studded tiles are available in the following colours:

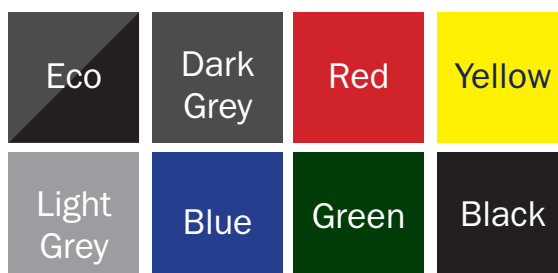

N.B. Other colours are available depending on quantity required. Colours shown above may vary from colour of manufacture.



STANDARD STUDDED Technical Specification

STANDARD	Material (PVC) Weight (kg)	Polyvinyl Chloride 1.5 kg / tile
	Tile Dimensions	500mm ²
BS EN 428	Thickness	4.5 ± 0.2
BS EN 423	Staining Resistance	√
BS EN 425	Castor Chair Suitability	√
BS EN 427	Squareness & Straightness	<0.05
BS EN 660-2	Abrasion Resistance (wear group)	P
BS EN 649	Class 34/43 - Commercial Very Heavy/ Light Industrial	√
BS EN 435	Flexibility (mm)	No cracking at 10mm
BS EN 20105	B02 Light Fastness	>7
BS EN 433	Residual Indentation (mm)	≤0.10
BS EN ISO 140-8	Impact Noise Reduction (dB)	16
BS EN 434	Dimensional Stability (%)	0.11
BS EN 434	Curling After Exposure Heat (mm)	0.15
BS EN 14041	European Building Standard	√
BS EN 13501	Reaction To Fire Performance	Bfl-S1
BS EN 14184	Formaldehyde Content (Class)	E1 (CWFT)
BS EN 12667	Thermal Resistance (m ² k/w)	0.02719
BS EN 1081	Electrical Resistance (ohms)	≤10 ⁵⁻⁹ Ω
BS EN 1815	Static Electrical Propensity (kv)	<2.0
BS EN 13893	Slip Resistance (class)	DS
DIN 51130	German Standard Slip Resistance	R10

For more information contact us now:

Telephone: +44 (0) 28 9262 5898 **Email:** info@flexi-tile.com

Flexi-Tile, 5 Ferguson Drive, Knockmore Hill Industrial Park, Lisburn, Northern Ireland, BT28 2EX

www.flexi-tile.com is part of the Unicorn Group