

Available in 100%
recycled Eco version



25
YEAR GUARANTEE

ECLIPSE MINI SLATE

With its hidden interlock system, the Eclipse Mini Slate is perfect for a wide range of applications, which include commercial, domestic and office flooring.

At 5mm thick and measuring 458mm x 458mm, the Eclipse Mini is the smallest tile in the Flexi-Tile range. Specially designed for areas of high footfall and daily usage, the Eclipse Mini is stain resistant and comes with a 25-year guarantee.

The Flexi-Tile Eclipse Mini can be installed on damaged, cracked and damp concrete and epoxy surfaces with minimal sub-floor preparation. The unique loose lay system means the Flexi-Tile Eclipse Mini is quick and easy to install, with minimal downtime in comparison to other flooring types.

Available in 8 different colours, the 5mm Eclipse Mini Slate range is regularly used in commercial premises and public areas, such as gyms, schools and garage showrooms. With anti-slip and noise reduction attributes, Flexi-Tile Eclipse Mini meets all EU safety standards, whilst also looking visually attractive and feeling comfortable underfoot.


Benefits and features of this product are:

- Unique hidden interlock
- Quick and easy to install - Minimal downtime
- Low maintenance
- Reaction to fire performance - BFL-S1
- Anti-Slip
- Resistant to most chemicals
- 100% recyclable
- Sound absorbing
- Anti-fatigue
- Resists punctures & abrasions

Colour Options

Eclipse Mini Slate Range

Eclipse Mini Slate tiles are available in the following colours:

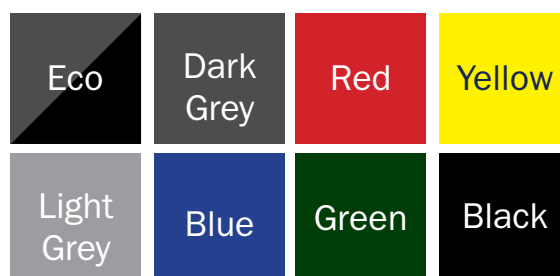

N.B. Other colours are available depending on quantity required. Colours shown above may vary from colour of manufacture.



ECLIPSE MINI SLATE Technical Specification

STANDARD	Material (PVC) Weight (kg)	Polyvinyl Chloride 1.45 kg / tile
	Tile Dimensions	458mm ²
BS EN 428	Thickness	5 ± 0.2
BS EN 423	Staining Resistance	√
BS EN 425	Castor Chair Suitability	√
BS EN 427	Squareness & Straightness	<0.04
BS EN 660-2	Abrasion Resistance (wear group)	T
BS EN 649	Class 34/43 - Commercial Very Heavy/ Light Industrial	√
BS EN 435	Flexibility (mm)	No cracking at 10mm
BS EN 20105	B02 Light Fastness	>7
BS EN 433	Residual Indentation (mm)	≤0.10
BS EN ISO 140-8	Impact Noise Reduction (dB)	16
BS EN 434	Dimensional Stability (%)	0.04
BS EN 434	Curling After Exposure Heat (mm)	0.04
BS EN 14041	European Building Standard	√
BS EN 13501	Reaction To Fire Performance	Bfl-S1
BS EN 14184	Formaldehyde Content (Class)	E1 (CWFT)
BS EN 12667	Thermal Resistance (m ² k/w)	0.02956
BS EN 1081	Electrical Resistance (ohms)	≤10 ¹³ Ω
BS EN 1815	Static Electrical Propensity (kv)	<2.0
BS EN 13893	Slip Resistance (class)	DS
DIN 51130	German Standard Slip Resistance	R10

For more information contact us now:

Telephone: +44 (0) 28 9262 5898 **Email:** info@flexi-tile.com

Riverbank, The Green, Lisburn, BT27 5SR, Northern Ireland, UK

www.flexi-tile.com is part of the Unicorn Group