

25
YEAR GUARANTEE

FLEXI-TILE 10

With quick and easy installation, Flexi-Tile 10 tiles are the no.1 option for coverage of larger floor surfaces such as factories, warehouses and distribution centres.

Available in seven colours, Flexi-Tile will brighten up your chosen area and offer the perfect solution to dust and dirt caused by cracked and damaged concrete or epoxy flooring. The loose lay system means Flexi-Tile tiles are also ideal for areas that are plagued by subfloor dampness, due to their unique breathable properties.


As a result of slightly larger surface dimensions (53cm x 53cm), Flexi-Tile 10 tiles are often used for larger projects, such as major retail and industrial production facilities. Quickly installed on practically any surface, the Flexi-Tile 10 is a durable and hassle free option.

Benefits & features of this product are:

- Dovetail interlock
- Interlocking PVC tile
- Easy installation
- Low maintenance
- Fire retardant
- Anti-Slip
- Resistant to most chemicals
- 100% recyclable
- Sound Absorbing
- Anti-fatigue
- Resists punctures & abrasions

Colour Options

Flexi-Tile 10 tiles are available in the following colours:

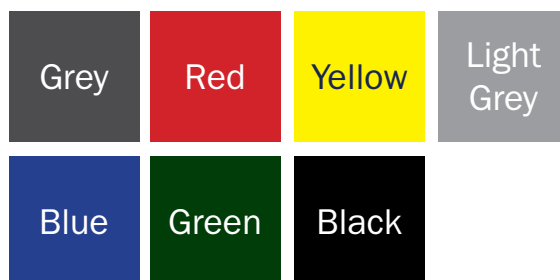

N.B. Other colours are available depending on quantity required. Colours shown above may vary from colour of manufacture.



FLEXI-TILE 10 Technical Specification

STANDARD	Material (PVC) Weight (kg)	Polyvinyl Chloride 3.9 kg / tile
	Tile Dimensions	530mm ²
BS EN 428	Thickness	10 ± 0.2
BS EN 423	Staining Resistance	√
BS EN 425	Castor Chair Suitability	√
BS EN 427	Squareness & Straightness	<0.05
BS EN 660-2	Abrasion Resistance (Wear Group)	T
BS EN 649	Class 34 - Commercial/Very Heavy	√
BS EN 649	Class 43 - Light Industrial/Very Heavy	√
BS EN 435	Flexibility (mm)	No cracking at 10mm
BS EN 20105	B02 Light Fastness	>7
BS EN 433	Residual Indentation (mm)	≤0.10
BS EN ISO 140-8	Impact Noise Reduction (Db)	16
BS EN 434	Dimensional Stability (%)	0.11
BS EN 434	Curling After Exposure Heat (mm)	0.15
BS EN 14041	European Building Standard	√
BS EN 13501	Reaction To Fire Performance	Bfl-S1
BS EN 14184	Formaldehyde Content (Class)	E1 (CWFT)
BS EN 12667	Thermal Resistance (m ² K/W)	0.03807
EN 1081	Electrical Resistance (Ohms)	≤10 ¹⁴ Ω
BS EN 1815	Static Electrical Propensity (Kv)	<2.0
BS EN 13893	Slip Resistance (Class)	DS
DIN 51130	German Standard Slip Resistance	R10
DIN 53516	Mechanical Resistance	17N/mm ²
EC 19072006	Reach Compliant	√
SHORE A	Hardness	92

For more information contact us now: **Telephone:** +44 (0) 28 9262 5898 **Email:** info@flexi-tile.com

Riverbank, The Green, Lisburn, BT27 5SR, Northern Ireland, UK

www.flexi-tile.com is part of the Unicorn Group