

Available in 100%  
recycled Eco version



**25**  
YEAR GUARANTEE

## ECLIPSE MINI TEXTURED

**With its hidden interlock system, the Eclipse Mini Textured is perfect for a wide range of applications, including commercial, domestic and office flooring.**

At 5mm thick and measuring 458mm x 458mm, the Eclipse Mini is our smallest tile in the Flexi-Tile range. Specially designed for areas of high footfall and daily usage, the Eclipse Mini is stain resistant and comes with a 25-year guarantee.

The Flexi-Tile Eclipse Mini can be installed on damaged, cracked and damp concrete and epoxy surfaces with minimal sub-floor preparation. The unique loose lay system means the Eclipse Mini is quick and easy to install, with minimal downtime in comparison to other flooring types.

Available in 8 different colours, the 5mm Eclipse Textured range is regularly used in commercial premises and public areas, such as gyms, schools and garage showrooms. With anti-slip and noise reduction attributes, Eclipse Mini Textured meets all EU safety standards, whilst also looking visually attractive and feeling comfortable underfoot. Easily cleaned and maintained, every Flexi-Tile range comes with a full 25-year guarantee.


### Benefits and features of this product are:

- Unique hidden interlock
- Quick to install - Minimal production downtime
- Low maintenance
- Reaction to fire performance - BFL-S1
- Anti-slip
- Resistant to most chemicals
- 100% recyclable
- Sound absorbing
- Anti-fatigue
- Resists punctures & abrasions
- Available in a standard or ESD version

### Colour Options

#### Eclipse Mini Textured Range

Eclipse Mini Textured tiles are available in the following colours:

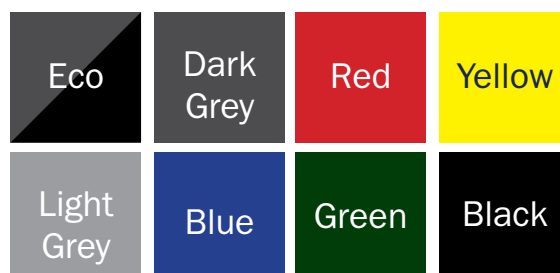

**N.B.** Other colours are available depending on quantity required. Colours shown above may vary from colour of manufacture.



## ECLIPSE MINI TEXTURED Technical Specification

STANDARD	Material (PVC) Weight (kg)	Polyvinyl Chloride 1.45 kg / tile
	Tile Dimensions	458mm <sup>2</sup>
BS EN 428	Thickness	5 ± 0.2
BS EN 423	Staining Resistance	√
BS EN 425	Castor Chair Suitability	√
BS EN 427	Squareness & Straightness	<0.04
BS EN 660-2	Abrasion Resistance (wear group)	T
BS EN 649	Class 34/43 - Commercial Very Heavy/ Light Industrial	√
BS EN 435	Flexibility (mm)	No cracking at 10mm
BS EN 20105	B02 Light Fastness	>7
BS EN 433	Residual Indentation (mm)	≤0.10
BS EN ISO 140-8	Impact Noise Reduction (dB)	16
BS EN 434	Dimensional Stability (%)	0.04
BS EN 434	Curling After Exposure Heat (mm)	0.04
BS EN 14041	European Building Standard	√
BS EN 13501	Reaction To Fire Performance	Bfl-S1
BS EN 14184	Formaldehyde Content (Class)	E1 (CWFT)
BS EN 12667	Thermal Resistance (m <sup>2</sup> k/w)	0.02956
BS EN 1081	Electrical Resistance (ohms)	≤10 <sup>13</sup> Ω
BS EN 1815	Static Electrical Propensity (kv)	<2.0
BS EN 13893	Slip Resistance (class)	DS
DIN 51130	German Standard Slip Resistance	R10

For more information contact us now:

**Telephone:** +44 (0) 28 9262 5898 **Email:** info@flexi-tile.com

Riverbank, The Green, Lisburn, BT27 5SR, Northern Ireland, UK

**www.flexi-tile.com** is part of the Unicorn Group