

Available in 100% recycled Eco version

10 YEAR WARRANTY Expected Lifespan 20+ Years

FLEXI-TILE® ECLIPSE MINI SLATE

The Eclipse tile is designed with a **hidden interlock** system which gives the impression of **traditional ceramic/stone** tile flooring. It is the perfect PVC floor tile for a range of applications including **commercial, domestic** and **office flooring**.

The Eclipse Range is suitable for **foot traffic** and available in **two finishes**, our standard **textured** and the exclusive to Eclipse Mini - our **slate finish**.

Applications



Retail



Office



Domestic



Gym

Standard Colours



Dark Grey



Light Grey



Black



Blue



Yellow



Green



Red



The Eclipse tile is designed with a **hidden interlock** system



Alternative to traditional stone floor



Anti-slip properties



Reduced Fatigue



Protects



Easy Installation



Environmentally Friendly



Low Maintenance



Resistant to most chemicals




FLEXI-TILE[®] ECLIPSE MINI SLATE Technical Specification

STANDARD	Material (PVC) Weight (kg)	Polyvinyl Chloride 1.3kg / tile
	Tile Dimensions	458 X 458mm
BS EN 428	Thickness	5 ± 0.2
BS EN 423	Staining Resistance	√
BS EN 425	Castor Chair Suitability	√
BS EN 427	Squareness & Straightness	<0.05
BS EN 660-2	Abrasion Resistance (Wear Group)	T
BS EN 649	Class 34 - Commercial/Very Heavy	√
BS EN 649	Class 43 - Light Industrial/Very Heavy	√
BS EN 20105	B02 Light Fastness	>7
BS EN 433	Residual Indentation (mm)	≤0.10
BS EN ISO 140-8	Impact Noise Reduction (Db)	16
BS EN 434	Dimensional Stability (%)	0.11
BS EN 434	Curling After Exposure Heat (mm)	0.15
BS EN 14041	European Building Standard	√
BS EN 13501	Reaction To Fire Performance	Bfl-S1
BS EN 14184	Formaldehyde Content (Class)	E1 (CWFT)
BS EN 12667	Thermal Resistance (m ² K/W)	0.03807
EN 1081	Electrical Resistance (Ohms)	≤10 ¹⁴ Ω
BS EN 1815	Static Electrical Propensity (Kv)	<2.0
BS EN 13893	Slip Resistance (Class)	DS
DIN 51130	German Standard Slip Resistance	R10
DIN 53516	Mechanical Resistance	17N/mm ²
EC 19072006	Reach Compliant	√
SHORE A	Hardness	92

For more information contact us now: **Telephone:** +44 (0) 28 9262 5898 **Email:** info@flexi-tile.com

Riverbank, The Green, Lisburn, BT27 5SR, Northern Ireland, UK

www.flexi-tile.com is part of the Unicorn Group

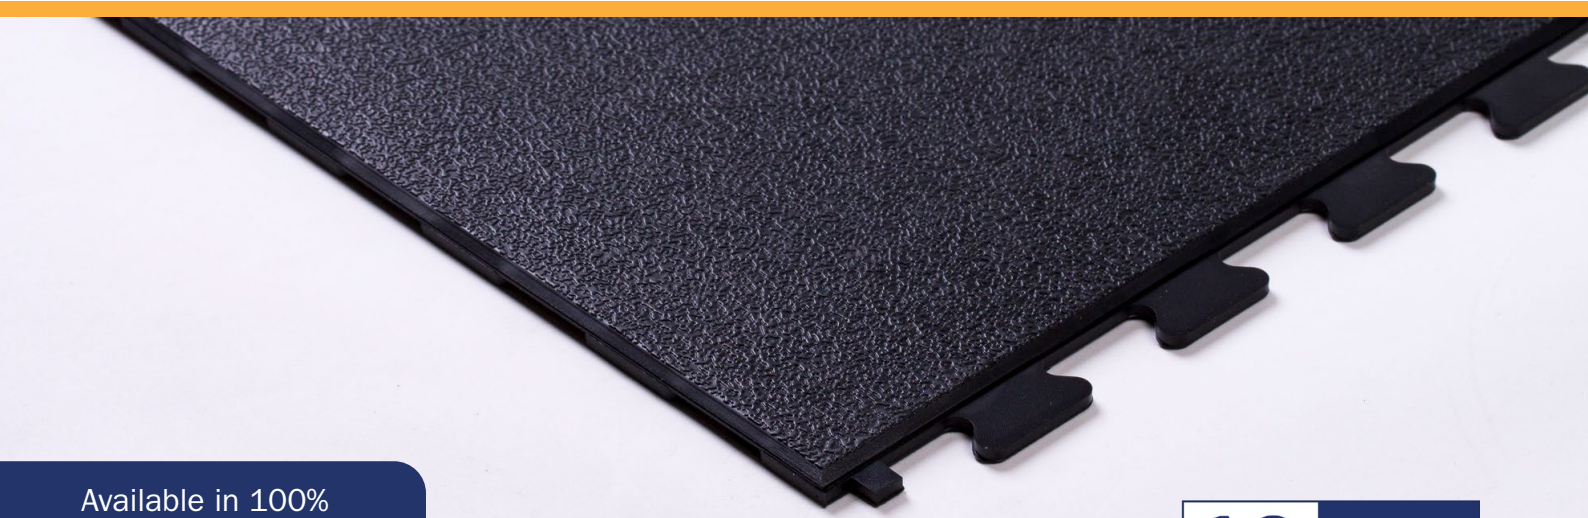

Available in 100% recycled Eco version

10 YEAR WARRANTY Expected Lifespan 20+ Years

FLEXI-TILE® ECLIPSE MINI TEXTURED

The Eclipse tile is designed with a **hidden interlock** system which gives the impression of **traditional ceramic/stone** tile flooring. It is the perfect PVC floor tile for a range of applications including **commercial, domestic** and **office flooring**.

The Eclipse Range is suitable for **foot traffic** and available in **two finishes**, our standard **textured** and the exclusive to Eclipse Mini - our **slate finish**.

Applications



Retail



Office



Domestic



Gym

Standard Colours



The Eclipse tile is designed with a **hidden interlock** system



Alternative to traditional stone floor



Anti-slip properties



Reduced Fatigue



Protects



Easy Installation



Environmentally Friendly



Low Maintenance



Resistant to most chemicals



FLEXI-TILE[®] ECLIPSE MINI TEXTURED Technical Specification

STANDARD	Material (PVC) Weight (kg)	Polyvinyl Chloride 1.3kg / tile
	Tile Dimensions	458 X 458mm
BS EN 428	Thickness	5 ± 0.2
BS EN 423	Staining Resistance	√
BS EN 425	Castor Chair Suitability	√
BS EN 427	Squareness & Straightness	<0.05
BS EN 660-2	Abrasion Resistance (Wear Group)	T
BS EN 649	Class 34 - Commercial/Very Heavy	√
BS EN 649	Class 43 - Light Industrial/Very Heavy	√
BS EN 20105	B02 Light Fastness	>7
BS EN 433	Residual Indentation (mm)	≤0.10
BS EN ISO 140-8	Impact Noise Reduction (Db)	16
BS EN 434	Dimensional Stability (%)	0.11
BS EN 434	Curling After Exposure Heat (mm)	0.15
BS EN 14041	European Building Standard	√
BS EN 13501	Reaction To Fire Performance	Bfl-S1
BS EN 14184	Formaldehyde Content (Class)	E1 (CWFT)
BS EN 12667	Thermal Resistance (m ² K/W)	0.03807
EN 1081	Electrical Resistance (Ohms)	≤10 ¹⁴ Ω
BS EN 1815	Static Electrical Propensity (Kv)	<2.0
BS EN 13893	Slip Resistance (Class)	DS
DIN 51130	German Standard Slip Resistance	R10
DIN 53516	Mechanical Resistance	17N/mm ²
EC 19072006	Reach Compliant	√
SHORE A	Hardness	92

For more information contact us now: **Telephone:** +44 (0) 28 9262 5898 **Email:** info@flexi-tile.com

Riverbank, The Green, Lisburn, BT27 5SR, Northern Ireland, UK

www.flexi-tile.com is part of the Unicorn Group