



**10 YEAR WARRANTY**      **Expected Lifespan 20+ Years**

## UNICORN TILE 5MM TEXTURED

Unicorn Tile 5mm is designed for commercial, domestic and light industrial applications. Easily cleaned and maintained, the Flexi-tile product range comes with a 10-year guarantee, however with care and proper maintenance has an expected lifespan of 20+ years. With Flexi-Tile you can create a high quality experience that can withstand the rigors of your daily requirements and is an excellent alternative to continually painting your floor.

Unicorn Tile 5mm is manufactured with an interlock design, which gives this tile increased structural strength whilst maintaining ease of installation.

### Applications



Retail



Office



Light Industry



Domestic



Gym



Garage

### Standard Colours



Dark Grey




Light Grey



Black



Blue



Yellow



Green



Red



Comfortable Underfoot



Sound Absorbing



Reduce Fatigue



Anti-Slip properties



Protects



Easy Installation




Environmentally friendly



Low Maintenance



Resistant to most chemicals

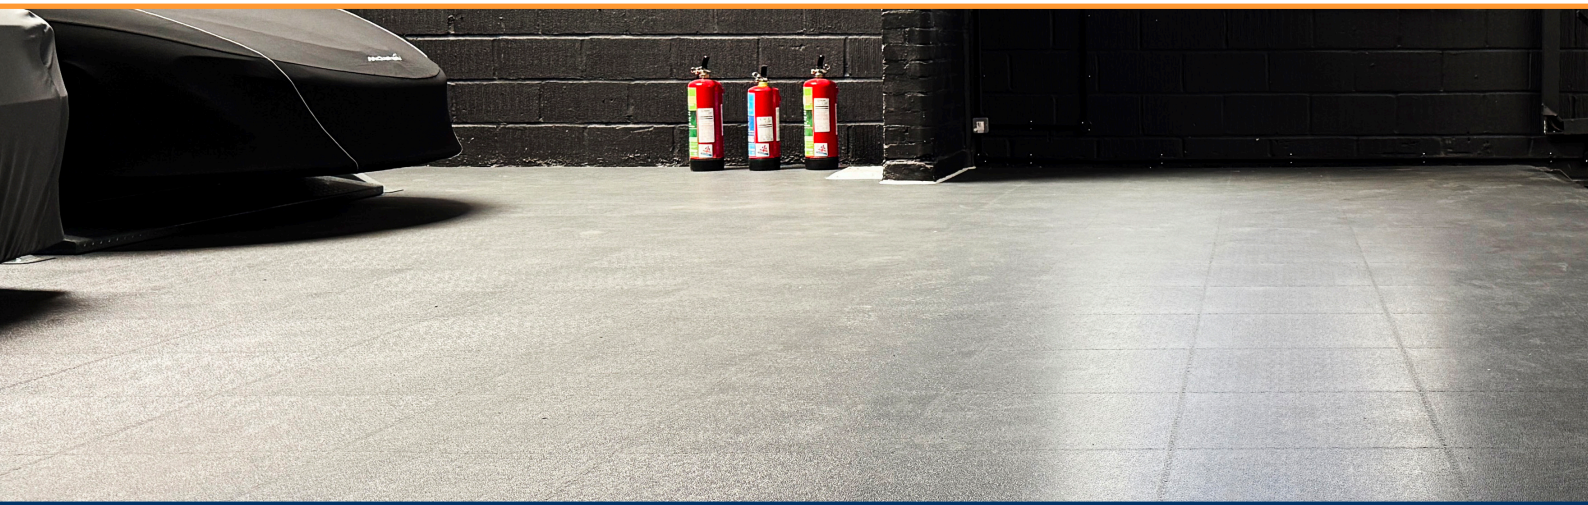

## UNICORN TILE 5MM TEXTURED Technical Specification

STANDARD	Material (PVC)	Polyvinyl Chloride
	Weight (kg)	1.5kg (+/- 50g)
	Tile Dimentions	490 x 490mm
BS EN 428	Thickness	5 (+/- 0.5)
BS EN 423	Staining Resistance	√
BS EN 425	Castor Chair Suitability	√
BS EN 427	Squareness & Straightness	<0.05
BS EN 660-2	Abrasion Resistance (Wear Group)	T
BS EN 649	Class 34 - Commercial/Very Heavy	√
BS EN 649	Class 43 - Light Industrial/Very Heavy	√
BS EN 20105	B02 Light Fastness	>7
BS EN 433	Residual Indentation (mm)	0.10
BS EN ISO 140-8	Impact Noise Reduction (Db)	16
BS EN 434	Dimensional Stability (%)	0.11
BS EN 434	Curling After Exposure Heat (mm)	0.15
BS EN 14041	European Building Standard	√
BS EN 13501	Reaction To Fire Performance	Bfl-S1
BS EN 14184	Formaldehyde Content (Class)	E1 (CWFT)
BS EN 12667	Thermal Resistance (m2 K/W)	0.03807
EN 1081	Electrical Resistance (Ohms)	≤10 <sup>4</sup> Ω
BS EN 1815	Static Electrical Propensity (Kv)	<2.0
BS EN 13893	Slip Resistance (Class)	DS
DIN 51130	German Standard Slip Resistance	R10
DIN 53516	Mechanical Resistance	17N/mm <sup>2</sup>
EC 19072006	Reach Compliant	√
SHORE A	Hardness	92

For more information contact us now: **Tel:** +44 (0) 28 9262 5898 | **Email:** info@flexi-tile.com  
Riverview, The Green, Lisburn, BT27 5SR, Northern Ireland, UK

[www.flexi-tile.com](http://www.flexi-tile.com) is part of the Unicorn Group