



**10 YEAR WARRANTY**      **Expected Lifespan 20+ Years**

## UNICORN TILE 7MM TEXTURED

Specifically designed for heavy weight usage, Unicorn Tile 7mm is our most versatile flooring solution. It can withstand the tough demands of industry and manufacturing while providing a safe working environment.

The 7mm thick tiles' surface is designed to help support and withstand heavy loads, the daily use of forklifts, pallet trucks and other production machinery up to 800kg (3 wheel traffic) or 1000kg (4 wheel traffic).\*

### Applications



Industrial



Factory



Workshop



Warehouse



Production Facilities

### Standard Colours



Dark Grey




Light Grey



Black



Blue



Yellow



Green



Red



Comfortable Underfoot



Sound Absorbing



Reduce Fatigue



Anti-Slip properties



Protects



Easy Installation



Environmentally friendly




Low Maintenance



Resistant to most chemicals

\* For details when adhesive is required see wheel guide

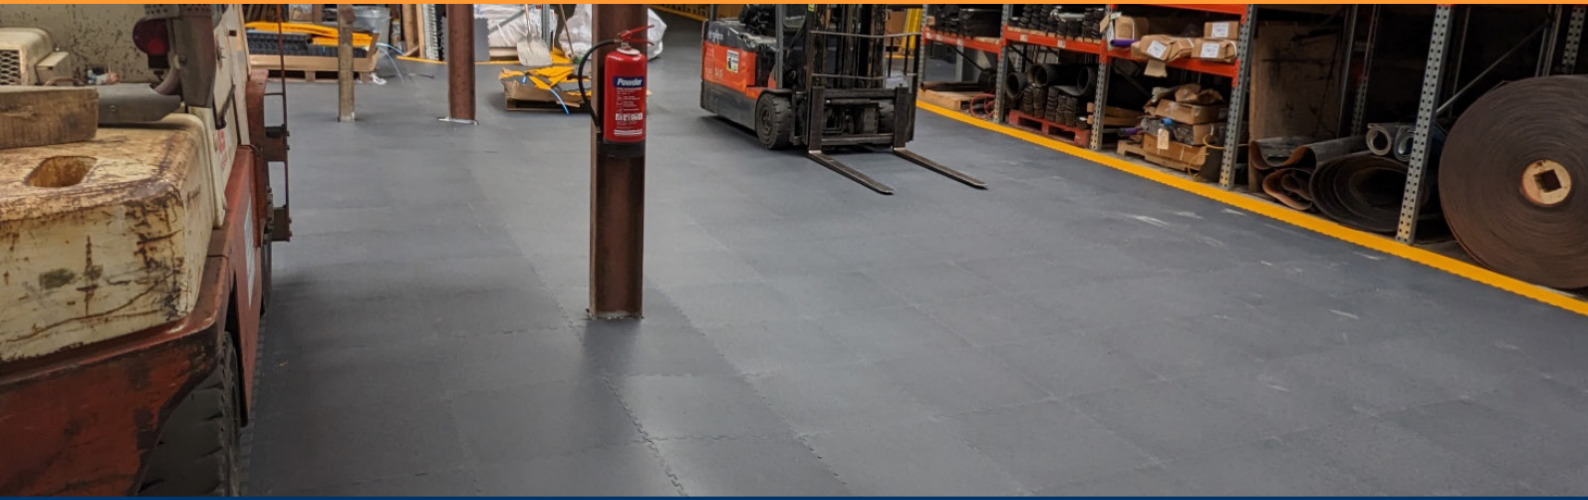

## UNICORN TILE 7MM TEXTURED Technical Specification

STANDARD	Material (PVC)	Polyvinyl Chloride
	Weight (kg)	2kg (+/- 50g)
	Tile Dimentions	490 x 490mm
BS EN 428	Thickness	7 (+/- 0.5)
BS EN 423	Staining Resistance	√
BS EN 425	Castor Chair Suitability	√
BS EN 427	Squareness & Straightness	<0.05
BS EN 660-2	Abrasion Resistance (Wear Group)	T
BS EN 649	Class 34 - Commercial/Very Heavy	√
BS EN 649	Class 43 - Light Industrial/Very Heavy	√
BS EN 20105	B02 Light Fastness	>7
BS EN 433	Residual Indentation (mm)	0.10
BS EN ISO 140-8	Impact Noise Reduction (Db)	16
BS EN 434	Dimensional Stability (%)	0.11
BS EN 434	Curling After Exposure Heat (mm)	0.15
BS EN 14041	European Building Standard	√
BS EN 13501	Reaction To Fire Performance	Bfl-S1
BS EN 14184	Formaldehyde Content (Class)	E1 (CWFT)
BS EN 12667	Thermal Resistance (m2 K/W)	0.03807
EN 1081	Electrical Resistance (Ohms)	≤10 <sup>4</sup> Ω
BS EN 1815	Static Electrical Propensity (Kv)	<2.0
BS EN 13893	Slip Resistance (Class)	DS
DIN 51130	German Standard Slip Resistance	R10
DIN 53516	Mechanical Resistance	17N/mm2
EC 19072006	Reach Compliant	√
SHORE A	Hardness	92

For more information contact us now: **Tel:** +44 (0) 28 9262 5898 | **Email:** info@flexi-tile.com  
Riverview, The Green, Lisburn, BT27 5SR, Northern Ireland, UK

[www.flexi-tile.com](http://www.flexi-tile.com) is part of the Unicorn Group